



Arboricultural Assessment  
10 Alvina Street, Oakleigh South  
Former Clayton West Primary School

Prepared for  
Department of Education and Early Childhood Development

Prepared by David Phillips

19/04/2013



Contents.

Client Brief.....	3
1. Summary .....	3
2. Method:.....	4
3 Observations .....	5
4 Permit requirement: .....	7
5 Design proposal:.....	8
6. Photographic examples.....	9
7. Conclusion and Recommendations:.....	10
References:.....	10
Appendix 1: Tree details: 10 Alvina Street, Oakleigh South.....	11
Appendix 1: Tree Group details: 10 Alvina Street, Oakleigh South.....	18
Appendix 2: Tree numbers & locations: 10 Alvina Street, Oakleigh South. ....	19
Appendix 3: Arboricultural Descriptors (October 2011) .....	20
Appendix 4: Tree protection zones .....	24

Ref: 10 Alvina Street, Oakleigh South.

File No.  
13\_4880

Version  
1

Author  
David Phillips

Issue date  
19/04/2013

Issued by.  
DP

## Client Brief

The Department of Education and Early Childhood Development contracted Tree Logic to undertake an assessment of trees associated with rezoning and potential development of the former Clayton West Primary School at 10 Alvina Street, Oakleigh South.

The arboricultural consultancy was required to provide;

- A description of the assessment methods.
- A detailed tree assessment including species, dimensions, condition and arboricultural rating.
- Guidelines for tree protection.
- A plan (aerial image) that geographically locates and identifies (unique identifier - Tree No.) the assessed trees.
- Additional information included
  - Recommendations on any tree pruning works required to successfully retain suitable trees.
  - Geo-location point data for each tree point (X, Y co-ordinates).

## 1. Summary

- 1 Eighty-three (83) trees and two (2) tree groups were assessed within the tree study area.
- 2 In general, the site comprised trees of average and below average quality, located around the perimeters and other individual trees scattered throughout. One tree group was located in the walkway to the east and another group was located in the south-west corner. Several trees were considered to be landscape features within the site.
- 3 All trees were attributed an arboricultural rating that reflects the retention value of each tree.
  - Four (4) trees were attributed an arboricultural rating of High. (4.8%)
  - Twenty-eight (28) trees were attributed an arboricultural rating of Moderate. (33.7%)
  - Thirty-nine (39) trees were rated Low. (47%)
  - Twelve (12) trees and the tree group were attributed an arboricultural rating of None. (14.5%)

*Refer to Table 5 in Section 3 for tree numbers and tree assessment data in Appendix 1.*

- 3.1 High and Moderate rated trees represent the best opportunity to retain established trees of Fair or better quality.
- 3.2 Low rated trees had health or structural deficiencies or were established tree weed species. Such trees are not considered worthy of being a constraint on reasonable design intent.
- 3.3 Trees rated None generally had structural defects, were hazardous or were self-sown weeds that should be removed for environmental reasons.
- 4 Tree protection zones (TPZ) have been calculated for each tree in accordance with the Australian Standard for Protection of Trees on Development Sites (AS 4970-2009). The TPZ is provided in the tree assessment data in Appendix 1, as a radial measurement.
  - 4.1 The nominated TPZ may be reduced by 10% on one side if a commensurate area is allocated elsewhere and contiguous with the TPZ. TPZs have also been supplied in Appendix 1.
  - 4.2 Existing soil grades must remain unaltered within the tree protection zone.
  - 4.3 Excavation or trenching for installation of footings or underground services must not occur within the TPZ of any retained trees unless based on results of Non-destructive root investigation (NDRI) and approved by the site arborist and the relevant authority.

## 2. Method:

### 2.1 Site inspection methodology;

A site inspection was undertaken during mild conditions on the afternoon of Wednesday, April 3, 2013. The trees were inspected from the ground and observations were made of the growing environment and surrounding area. The trees were not climbed and no samples of the trees or site soil were taken.

Observations were made of the trees to determine age and condition, with measurements taken to establish tree height (measured with a height meter), crown width (paced) and trunk diameter (measured at 1.4m above grade unless otherwise stated). Definitions of arboricultural descriptors can be seen in Appendix 3.

The trees were plotted on orthorectified aerial imagery with GIS based software on field tablet computers with GPS and measuring tool capabilities. Geographical latitude and longitudinal reference points (X, Y coordinates) have been generated and included in the assessment data tables supplied with the report. These coordinates are accurate to within 2 to 3 metres and are considered adequate for pre-planning purposes. The location of trees nominated to be retained should be accurately located by conventional survey means prior to preparing any final designs.

The report includes assessment details in the Tree Assessment Tables in Appendix 1 and relate to the trees numbered on the site plan in Appendix 2.

Photographs of some trees and site conditions were taken for further reference and inclusion in the report.

### 2.2 Arboricultural assessment method;

The health and structural characteristics of each tree were assessed and each tree was attributed an 'Arboricultural Rating'. The arboricultural rating correlates the combination of tree condition factors (health, structure & form) with tree amenity value. Amenity relates to the trees biological, functional and aesthetic characteristics within a built environment. The arboricultural rating in combination with other factors can assist the project team and planners in nominating trees suitable for retention. The four arboricultural ratings used by Tree Logic include:

- **High:** Trees of high quality in good to fair condition. Retention of such trees is highly desirable.
- **Moderate:** Trees with a Moderate arboricultural rating were generally suitable for retention and design should attempt to incorporate these trees and provide adequate clearances during development stages where reasonable design intent is not unduly hampered.
- **Low:** Trees with a Low arboricultural rating generally had low retention values. They were either fair specimens of relatively small size or displayed general health or structural deficiencies. Retention of Low rated trees may be considered in some instances if not requiring a disproportionate expenditure of resources to successfully incorporate into the design or manage ongoing condition.
- **None:** Trees attributed an arboricultural rating of None have health or structural characteristics that were beyond arboricultural maintenance or were environmental weed species.

Full tree descriptors are attached as Appendix 3.

### 2.3 Establishing Tree Protection Zones (TPZ);

2.3.1 To successfully retain suitable trees within or around a development site, consideration must be given to protecting the trunk, crown and roots of each specimen. Tree protection zones (TPZ's) are used to provide adequate space for the preservation of sufficient roots to maintain

tree health (particularly important for mature trees) whilst providing a buffer zone between construction activity and the tree trunk and crown.

2.3.2 The method for determining tree protection zones adopted in this report is the 'Australian Standard for Protection of trees on development sites' (AS4970-2009). The TPZ area is based on the trunk diameter measurement measured in metres at 1.4m and multiplied by 12 and is a guide for planning purposes. The trunk of the tree is used as the centre point for the measurement. TPZ measurements are included in the tree assessment data in Appendix 1.

2.3.3 Additional measurements can be calculated to determine the allowable encroachment on one side of the TPZ (Reduced TPZ) and the Structural Root Zone (SRZ) which is the absolute minimum required to maintain tree stability without consideration to ongoing health. Details of tree protection zone establishment, permissible encroachment and management guidelines are outlined in Appendix 4.

2.4 Documents reviewed include;

- Planning property reports and City of Monash Council planning zones and overlays. The site is zoned Public Use Zone – Education (PUZ2) and no specific overlays apply relating to tree management.
- Clause 22.05 Tree conservation policy of the City of Monash covers all properties in City of Monash. It is policy that existing semi-mature and mature canopy trees be retained wherever possible to ensure maintenance of the tree canopy.

Clause 52.17 of the Victorian Planning Provisions of the Planning and Environment Act, 1987 (Vic) applies to the site because the allotment is greater than 4,000 m<sup>2</sup> (0.4ha) in area.

Under clause 52.17 it is necessary to demonstrate what steps have been taken

- To avoid the removal of (Victorian) native vegetation.
- To minimise the removal of native vegetation.
- To appropriately offset the loss of native vegetation.

- Clause 52.17 applies only to vegetation native to Victoria. Vegetation planted for purposes of 'shelter belts, woodlots, street trees, gardens or the like' are exempt under 52.17-6 *unless planted with assistance from public funding*.

### 3 Observations

The tree study area is the former Clayton West Primary School on Alvina Street in Oakleigh South. It is a flat allotment of approximately 2ha with no creeks or natural drainage lines within the site. Residential housing allotments abut the site to the north, south, east and west and open parkland is located to the south-west. The former school buildings had been removed and a walkway enters the site off Scottsburn Avenue from the east.

3.1 The majority of trees are located around the perimeters and provide a screen to the neighbouring properties. Other individual trees occur throughout the site which would have formed amenity plantings around the buildings. Grass and weed cover have colonised areas where the building and foundations were once located.

The tree group located in the eastern walkway were self-sown weed species, Coast Wattle (*Acacia longifolia* var. *sophorae*), and the other tree group comprised Narrow-leaved Black Peppermint (*Eucalyptus nicholii*) located in the south-west corner where they were growing in close proximity to each other and of similar age and size.

Tree population:

3.2 Eighty-three (83) trees and two (2) tree groups were inspected.  
*Refer to Appendix 2 for tree locations and numbering.*

- 3.3 The origin of all trees was assessed to determine if any trees were indigenous to the local area or of other botanical significance. The origin of the assessed trees is indicated in Table 1.

Table 1: Tree origin	Total	
Victorian Native	16	19.3%
Australian Native	58	69.9%
Exotic Deciduous	6	7.2%
Exotic Evergreen	3	3.6%
Total	83	100%

Based on the species selection and spatial arrangement, it is concluded that all trees were specimens planted primarily for garden and amenity purposes and there were no naturally occurring indigenous trees.

- 3.4 Thirty-four (34) different species were observed within the tree population. The eleven most prevalent species on site are indicated in Table 2.

Table 2. Predominant species	Number of trees
Brush Box ( <i>Lophostemon confertus</i> )	23
Willow Myrtle ( <i>Agonis flexuosa</i> )	9
Sweet Pittosporum ( <i>Pittosporum undulatum</i> )	7
Red Flowering Gum ( <i>Corymbia ficifolia</i> )	4
Smooth – barked Apple ( <i>Angophora costata</i> )	4
Honey Bracelet-myrtle ( <i>Melaleuca armillaris</i> )	3
Dwarf Sugar Gum ( <i>Eucalyptus cladocalyx</i> 'Nana')	2
Desert Ash ( <i>Fraxinus angustifolia</i> subsp. <i>angustifolia</i> )	2
Lilly Pilly ( <i>Acmena smithii</i> )	2
Willow – leaved Hakea ( <i>Hakea salicifolia</i> )	2
Red Ironbark ( <i>Eucalyptus sideroxylon</i> )	2
Total	60 of 83

These species represented 72 % of the total tree population. Several Smooth – barked Apples, a Red Ironbark and an English Oak made a significant contribution to the site in terms of amenity and landscape values.

- 3.5 Tree health:

The health rating was assessed based on foliage colour, size and density as well as shoot initiation and elongation.

In general the trees displayed Fair health (79.5 %) which is considered to be typical for the species growing in this environment under the current conditions.

Within a localised area of the site, several Brush Box trees displayed signs of browning of the foliage at the base of the canopy, possibly associated with herbicide overspray or extreme reflected heat.

- 3.6 Tree structure:

The structure of the trees was assessed for structural defects and deficiencies, likelihood of failures and presence of targets.

In general the trees displayed Fair (53%) structural condition considered typical for the species and there were some structural defects that could not be amended with arboricultural maintenance.

Tree 65, a Bracelet Honey-Myrtle, Tree 70, a Lemon-scented Tea tree and Tree 80, a Willow Myrtle displayed active splits at the tree base and these trees are recommended for removal.

- 3.7 Trees may be considered significant to the landscape because of their size, dominance within the site, presence within outlooks and general amenity in terms of shade, screen, foliage and flowers and historic, cultural or horticultural characteristics. The key requirement for successful tree retention is to identify the trees that represent the best opportunity for retention and implement tree protection and design amendments before any site works commence. The arboricultural rating in combination with other factors can assist the project team and planners in nominating trees suitable for retention.

Each of the assessed trees was attributed an 'Arboricultural Rating'. The arboricultural rating correlates the combination of tree condition factors (health, structure & form) with tree amenity value. Amenity relates to the trees biological, functional and aesthetic characteristics within an urban landscape context and its ability to continue to provide these qualities into the medium to long term future.

It should be noted that the arboricultural rating is different to the conservation/ecological values placed on trees by other professions.

Table 3 indicates the arboricultural ratings attributed to the trees inspected.

Table 3: Arb. Rating	Total	Trees number
High	4	1, 26, 52, 61
Moderate	28	2, 3, 4, 8, 12, 13, 16, 19, 23, 28, 30, 32, 36, 39, 42, 44, 47, 50, 53, 54, 55, 60, 62, 63, 64, 71, 72, 74
Low	39	5, 6, 9, 10, 11, 15, 17, 20, 21, 22, 24, 25, 27, 29, 31, 33, 34, 35, 37, 40, 43, 46, 49, 57, 58, 59, 65, 66, 67, 69, 70, 73, 75, 78, 79, 80, 81, 82, 83
None	12	7, 14, 18, 38, 41, 45, 48, 51, 56, 68, 76, 77
Total	83	

- 3.7.1 High and Moderate rated trees represent trees of fair or better condition. These trees are considered to be suitable to retain and as having the best potential to be medium to long term features of the surrounding landscape if retained.

Pruning recommendations should be undertaken to enhance the longevity and safe retention of these trees.

Low rated trees were generally either of relatively small dimensions, of unremarkable quality, had a relatively short useful life expectancy or displayed below typical health or structure.

Low rated trees are not considered to be worthy of being a constraint on reasonable design intent and development within the site.

However, not all Low rated trees should be dismissed as some may still contribute to the landscape amenity as an established tree resource and have the potential to be safely retained if appropriate tree protection measures and arboricultural maintenance is provided as required.

- 3.7.2 Trees rated None were generally defective, hazardous or were self-sown weeds that should be removed for environmental reasons.

(Refer to Appendix 2 for tree location and numbering and Appendix 3 for tree descriptors).

#### 4 Permit requirement:

Based on the species selection and spatial arrangement, it is concluded that all trees were specimens planted primarily for garden and amenity purposes.

Monash has a Tree Conservation Policy (22.05) that applies to all properties in City of Monash. It is policy that existing semi-mature and mature canopy trees be retained wherever possible to ensure maintenance of the tree canopy.

## 5 Design proposal:

- 5.1 The pre-development arboricultural inspection report provides planners and designers with information on the measures required to protect trees suitable to be retained. At the time of undertaking the tree assessment there was no requirement to undertake a concept design review.
- 5.2 In the absence of formal design plans, it is not appropriate to speculate on which trees are most appropriate for retention beyond the general guide provided by the arboricultural ratings attributed to each tree feature.
- 5.3 It is recommended that trees of High and Moderate arboricultural value be considered for retention and protection over trees of Low or No arboricultural value during any redevelopment of the site.
- 5.4 The Low rated trees within the site were either deficient in health or structure or were of small size and were not worthy of being a constraint on reasonable design intent.
  - 5.4.1 However not all Low rated trees should be dismissed altogether. Some Low rated trees can be retained as an established tree resource where they are not impacted directly by any proposed construction activity or where they perform a role such as screening neighbouring properties or the like or protect from erosion, winds, frosts or other actions.
- 5.5 Weed species should generally be removed for sound environmental reasons.
- 5.6 The tree protection zones (TPZ) have been determined for each tree based on the Australian Standard for Protection of Trees on Development Sites (AS 4970-2009). The method for calculating, applying and managing the tree protection zone is described in Appendix 4.
  - 5.6.1 Where construction related activity is confined to only one side of the tree, the nominal TPZ may be reduced by 10% of the TPZ area which is equivalent to approximately 1/3 radial distance.
- 5.7 It is well understood that trees develop a relatively shallow lateral root system as opposed to a 'tap' root. Managing these surface roots must be considered with regard to any tree that is to be retained. Ensuring that existing soil levels are maintained within the nominated tree protection zone is important and any construction proposed within the TPZ of a retained tree must adopt a root sensitive design and construction method approved under consultation with the site arborist or the relevant authorities.
- 5.8 It is recommended that exclusion fencing be established around all retained trees prior to any further works occurring on site including bulk earthworks, excavation for footings or installation of underground services or any construction related activity to prevent damage to roots, buttress, trunk or limbs and to prevent soil compaction.
  - 5.8.1 The area within the TPZ should be mulched to 100mm depth with matured wood chip mulch with a particle size of 25mm for 75% of the volume.
  - 5.8.2 The growth of self-sown saplings or weed invasion should be controlled within the TPZ areas.

## 6. Photographic examples



1. Shows the relative size, condition and location of Tree 52, a Smooth-barked Apple. The tree was of High quality along with several other trees on the site. This tree is suitable and desirable to be retained.
2. Shows a section of the site looking towards trees located in the north-west. Grass and weeds colonised the areas formerly occupied by school buildings.
3. Shows the relative size, location and condition of Tree 24, a Spotted Gum, a Moderately rated tree and good example of a tree suitable for retention within the site.
4. Shows Tree Group 2, a group of Narrow-leaved Black Peppermint located in the south-west corner. These trees were of similar age and size and best managed as a group.
5. Shows trees located along the western boundary. These were trees of Low arboricultural value and provided screening from the neighbouring houses, however they should not be a constraint on reasonable development of the site.
6. Shows the active split in the trunk of Tree 80, a Willow Myrtle. This is a major structural defect and removal of the tree is recommended.

## 7. Conclusion and Recommendations:

- 7.1. Eighty-three (83) individual trees and two tree groups, comprising 11 additional trees, were inspected within the site of the former Clayton West Primary School at 10 Alvina Street, Oakleigh South.
- 7.2. All trees were attributed an arboricultural rating that reflects the retention value of each tree.
  - Four trees were attributed an arboricultural rating of High.
  - Twenty eight trees were attributed an arboricultural rating of Moderate.
  - Thirty nine trees were rated Low.
  - Twelve trees were attributed an arboricultural rating of None.

Refer to Page 7, Table 3 for tree numbers, Appendix 2 for tree locations and Appendix 3 for tree descriptors.

- 7.3. To successfully retain the nominated suitable trees, tree protection measures must be implemented prior to any commencing any construction related activity including demolition, bulk earthworks and must be maintained for the duration of the construction process including landscaping.
  - 7.3.1. Tree protection zones must be appropriately fenced to prevent vehicle access, excavation, trenching, contamination or raised soil levels occurring within the reduced TPZ.
- 7.4. Any pruning recommendations must be undertaken by a suitably qualified and experienced arborist and comply with Australian Standard AS 4373-2007 - Pruning of Amenity trees to extend the useful life expectancy of retained trees.

I am available to answer any questions arising from this report.

No part of this report is to be reproduced unless in full.

Signed



David Phillips

Consulting Arborist- Treelogic P/L

Associate Degree (Env Hort)

M 0433 513 587

E david.phillips@treelogic.com.au

---

## References:

Australian Standard (4970-2009) Protection of Trees on development sites.  
Standards Australia, Sydney NSW Australia

Clark, J.R. & Matheny, N.P (1998), Trees and Development: A technical guide to preservation of trees during land development. ISA , Champaign, Illinois.

Standards Australia (2007), Australian Standard (4373-2007) - Pruning of Amenity trees, Standards Australia, Homebush, NSW.

---

**Appendix 1: Tree details: 10 Alvina Street, Oakleigh South.**

Refer to following 9 pages.

DBH = Diameter at Breast Height (measured in centimetres at 1.4m above ground unless otherwise stated).

TPZ = Tree Protection Zone (metre radius). Radius distances measured in metres from the centre of the trunk.

For tree location and numbering refer Appendix 2. See Appendix 3 for Tree descriptors.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
1	Smooth-barked Apple (Angophora costata)	Australian Native	86	14	15	Semi-mature	Fair	Fair	High		10.3	
2	Yellow Gum (Eucalyptus leucoxydon)	Victorian Native	54 @ 1.0m	8	11	Semi-mature	Fair	Fair	Moderate		6.5	
3	Magenta Cherry (Syzygium paniculatum)	Australian Native	39,21,45	10	12	Semi-mature	Fair	Fair - Poor	Moderate		7.6	
4	Brush Box (Lophostemon confertus)	Australian Native	24,16	8	7	Semi-mature	Fair	Fair	Moderate		3.5	
5	Lilly Pilly (Acmena smithii)	Victorian Native	14,14,17,15,16	8	7	Semi-mature	Fair	Fair - Poor	Low		4.1	
6	Desert Ash (Fraxinus angustifolia subsp. angustifolia)	Exotic Deciduous	45	9	10	Semi-mature	Fair	Fair	Low	Weed Species	5.4	
7	Brittle Gum (Eucalyptus mannifera)	Australian Native	22	5	7	Semi-mature	Poor	Poor	None	Nearly Dead.	2.6	
8	Brush Box (Lophostemon confertus)	Australian Native	32, 18	9	9	Semi-mature	Good	Fair	Moderate		4.4	
9	Brush Box (Lophostemon confertus)	Australian Native	26, 35	8	11	Semi-mature	Good	Fair - Poor	Low	Included Bark Fork.	5.2	

Arboricultural Assessment Report – 10 Alvina Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
10	Brush Box (Lophostemon confertus)	Australian Native	30	6	6	Semi-mature	Fair	Fair	Low	Small size	3.6	
11	Brush Box (Lophostemon confertus)	Australian Native	25	6	6	Semi-mature	Fair	Fair	Low	Small size	3.0	
12	Brush Box (Lophostemon confertus)	Australian Native	37 @ 1.0m	7	7	Semi-mature	Fair	Fair	Moderate		4.4	
13	Brush Box (Lophostemon confertus)	Australian Native	42	8	7	Semi-mature	Fair	Fair	Moderate		5.0	
14	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	16,12,6	4	4	Semi-mature	Poor	Fair	None	Weed Species	2.5	
15	Brush Box (Lophostemon confertus)	Australian Native	43	8	9	Semi-mature	Fair	Fair - Poor	Low		5.2	
16	Snow in Summer (Melaleuca linariifolia)	Australian Native	36,25,13	6	7	Semi-mature	Fair	Fair	Moderate		5.5	
17	Red-flowering Gum (Corymbia ficifolia)	Australian Native	16, 35,20,21	7	9	Semi-mature	Fair	Fair - Poor	Low		5.8	
18	Box Elder (Acer negundo)	Exotic Deciduous	35	7	9	Semi-mature	Poor	Poor	None	Nearly Dead.	4.2	
19	Smooth-barked Apple (Angophora costata)	Australian Native	84	18	17	Mature	Fair	Fair	Moderate	Limb Decay. Weight reduce on western & central limbs	10.1	Weight Reduce
20	Red-flowering Gum (Corymbia ficifolia)	Australian Native	24,26,28,19	5	67	Semi-mature	Fair	Fair - Poor	Low		5.9	
21	Wallangarra White Gum (Eucalyptus scoparia)	Australian Native	55,45	10	13	Semi-mature	Fair	Fair - Poor	Low		8.5	

Arboricultural Assessment Report – 10 Alvina Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
22	Willow Myrtle (Agonis flexuosa)	Australian Native	40,32 @ 1.0m	7	6	Semi-mature	Fair	Fair - Poor	Low		6.1	
23	Brush Box (Lophostemon confertus)	Australian Native	39	9	8	Semi-mature	Fair	Fair	Moderate		4.7	
24	Willow Myrtle (Agonis flexuosa)	Australian Native	15,9,16	6	5	Semi-mature	Fair	Poor	Low	Stump Resprout.	2.8	
25	Narrow-leaved Black Peppermint (Eucalyptus nicholii)	Australian Native	63	13	10	Semi-mature	Fair	Fair - Poor	Low	Fungal bracket.	7.6	
26	English Oak (Quercus robur)	Exotic Deciduous	82	14	19	Mature	Good	Fair	High		9.8	Crown uplift
27	Bracelet Honey-myrtle (Melaleuca armillaris)	Victorian Native	54	8	9	Mature	Fair	Fair - Poor	Low		6.5	
28	Rose She-oak (Allocasuarina torulosa)	Australian Native	54	10	9	Semi-mature	Fair	Fair	Moderate		6.5	
29	Willow Myrtle (Agonis flexuosa)	Australian Native	50,46,33	10	10	Mature	Good	Fair - Poor	Low		9.1	
30	Spotted Gum (Corymbia maculata)	Victorian Native	69	18	15	Semi-mature	Fair	Fair	Moderate		8.3	
31	Bracelet Honey-myrtle (Melaleuca armillaris)	Victorian Native	47,45	7	13	Mature	Fair	Poor	Low	Subsiding limbs.	7.8	
32	Brush Box (Lophostemon confertus)	Australian Native	37	9	9	Semi-mature	Fair	Fair	Moderate		4.4	
33	Willow Myrtle (Agonis flexuosa)	Australian Native	58 @ 1.0m	5	10	Mature	Fair	Fair - Poor	Low		7.0	
34	Willow Myrtle (Agonis flexuosa)	Australian Native	70,41	9	14	Mature	Fair	Fair - Poor	Low	Fungal bracket.	9.7	
35	Willow Myrtle (Agonis flexuosa)	Australian Native	9,9,10,9,5	5	5	Semi-mature	Fair	Fair - Poor	Low		2.3	

Arboricultural Assessment Report – 10 Alvina Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
36	Brush Box (Lophostemon confertus)	Australian Native	41,20,14	7	10	Semi-mature	Fair	Fair	Moderate		5.7	
37	Brush Box (Lophostemon confertus)	Australian Native	15,16,22,7	6	10	Semi-mature	Fair	Poor	Low	Branch failure at base	3.8	
38	Tree Lucerne (Chamaecytisus palmensis)	Exotic Evergreen	5,5,9,11	4	6	Mature	Fair	Fair - Poor	None	Weed Species.	2.0	
39	Red-flowering Gum (Corymbia ficifolia)	Australian Native	20,22,25,23	10	13	Semi-mature	Fair	Fair	Moderate		5.4	
40	Coast Wattle (Acacia longifolia var. sophorae)	Victorian Native	14,11,8,9	5	7	Mature	Fair	Poor	Low		2.6	
41	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	36,	8	10	Semi-mature	Fair	Poor	None	Weed Species.	4.3	
42	Brush Box (Lophostemon confertus)	Australian Native	31	8	10	Semi-mature	Fair	Fair	Moderate		3.7	
43	Willow Myrtle (Agonis flexuosa)	Australian Native	97	10	12	Over Mature	Poor	Poor	Low	Dieback Crown.	11.6	
44	Brush Box (Lophostemon confertus)	Australian Native	30,16	10	11	Semi-mature	Fair	Fair	Moderate		4.1	
45	Desert Ash (Fraxinus angustifolia subsp. angustifolia)	Exotic Deciduous	25,10 @1.0m	7	8	Semi-mature	Fair	Fair	None	Weed species	3.2	
46	White Cedar (Melia azedarach)	Australian Native	9,17	6	6	Semi-mature	Fair	Fair	Low	Small size	2.3	
47	Red-flowering Gum (Corymbia ficifolia)	Australian Native	33	7	9	Semi-mature	Fair	Fair	Moderate		4.0	

Arboricultural Assessment Report – 10 Alvena Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
48	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	23,19,13	9	11	Semi-mature	Fair	Fair	None	Weed species	3.9	
49	Brush Box (Lophostemon confertus)	Australian Native	19	6	6	Semi-mature	Fair	Fair	Low	Small size	2.3	
50	Brush Box (Lophostemon confertus)	Australian Native	39 @ 1.0m	9	9	Semi-mature	Fair	Fair	Moderate		4.7	
51	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	22 @ 1.0m	5	7	Semi-mature	Fair	Fair	None	Weed species	2.6	
52	Smooth-barked Apple (Angophora costata)	Australian Native	79	15	19	Mature	Fair	Fair	High	Over-extended Limb on south side	9.5	Weight Reduce
53	Smooth-barked Apple (Angophora costata)	Australian Native	61	15	20	Semi-mature	Fair	Fair	Moderate	Partly Suppressed	7.3	Crown uplift
54	Lilly Pilly (Acmena smithii)	Victorian Native	26,25,22,1 5,16	10	10	Mature	Fair	Fair	Moderate		5.7	
55	Brush Box (Lophostemon confertus)	Australian Native	49 @ 0.5m	8	10	Semi-mature	Fair	Fair	Moderate		5.9	
56	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	26,29	7	11	Mature	Fair	Fair - Poor	None	Weed species	4.7	
57	Brush Box (Lophostemon confertus)	Australian Native	22,27	10	10	Semi-mature	Fair	Fair - Poor	Low		4.2	
58	Bushy Sugar Gum (Eucalyptus cladocalyx 'Nana')	Australian Native	50 @ 0.5m	9	8	Mature	Fair - Poor	Poor	Low		6.0	
59	Drooping She-oak (Allocasuarina verticillata)	Victorian Native	58	11	12	Mature	Fair	Poor	Low		7.0	

Arboricultural Assessment Report – 10 Alvena Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
60	Lemon-scented Gum (Corymbia citriodora)	Australian Native	31	15	10	Semi-mature	Fair	Fair	Moderate		3.7	
61	Red Ironbark (Eucalyptus sideroxylon)	Australian Native	63	18	15	Semi-mature	Good	Fair	High		7.6	
62	Brush Box (Lophostemon confertus)	Australian Native	24	8	6	Semi-mature	Fair	Fair	Moderate		2.9	
63	Brush Box (Lophostemon confertus)	Australian Native	34	7	6	Semi-mature	Fair	Fair	Moderate		4.1	
64	Brush Box (Lophostemon confertus)	Australian Native	41 @ 0.1m	11	12	Semi-mature	Fair	Fair	Moderate		4.9	Crown uplift
65	Bracelet Honey-myrtle (Melaleuca armillaris)	Victorian Native	42,44,65,70	10	17	Mature	Fair	Poor	Low	Active Split.	13.6	Remove
66	Bushy Sugar Gum (Eucalyptus cladocalyx 'Nana')	Australian Native	52 @ 0.5m	9	12	Mature	Fair	Poor	Low	Fungal bracket in primary union.	6.2	Crown reduction
67	Scented Paperbark (Melaleuca styphelioideas)	Australian Native	36	7	7	Semi-mature	Good	Fair - Poor	Low		4.3	
68	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	41 @ 0.5m	7	12	Semi-mature	Fair	Fair	None	Weed species	4.9	
69	Bottlebrush (Callistemon sp.)	Australian Native	18 @ 0.5m	5	5	Semi-mature	Fair	Fair - Poor	Low		2.2	
70	Lemon-scented Tea-tree (Leptospermum petersonii)	Australian Native	45	5	9	Mature	Fair	Very Poor	Low	Active Split.	5.4	Remove
71	Brush Box (Lophostemon confertus)	Australian Native	40	8	10	Semi-mature	Fair	Fair	Moderate		4.8	

Arboricultural Assessment Report – 10 Alvina Street, Oakleigh South.

Tree No.	Common Name (Botanical Name)	Origin	DBH (cm)	Height (m)	Width (m)	Life Stage	Health	Structure	Retention Value	Comments	TPZ (radial metres)	Recommended Work
72	Red Ironbark (Eucalyptus sideroxylon)	Australian Native	59	13	11	Mature	Fair	Fair	Moderate		7.1	
73	Brush Box (Lophostemon confertus)	Australian Native	25	5	6	Semi-mature	Fair	Fair	Low	Small size	3.0	
74	River She-oak (Casuarina cunninghamiana)	Australian Native	50	12	15	Semi-mature	Fair	Fair	Moderate		6.0	
75	Pink Tips (Photinia glabra)	Exotic Evergreen	35 @ 0.5m	6	6	Mature	Fair	Poor	Low		4.2	
76	Sweet Pittosporum (Pittosporum undulatum)	Victorian Native	13,13	7	5	Semi-mature	Poor	Poor	None		2.2	
77	Pohutukawa (Metrosideros excelsa)	Exotic Evergreen	24,25	5	3	Mature	Poor	Very Poor	None		4.2	
78	Willow-leaved Hakea (Hakea salicifolia)	Australian Native	13,15,19,15 @ 0.5m	5	7	Mature	Fair - Poor	Fair	Low		3.8	
79	Willow-leaved Hakea (Hakea salicifolia)	Australian Native	24,10,10,14 @ 0.1m	5	6	Mature	Fair - Poor	Fair - Poor	Low		3.7	
80	Willow Myrtle (Agonis flexuosa)	Australian Native	30,36,33	6	11	Over Mature	Fair - Poor	Poor	Low	Active Split.	6.9	Remove
81	Willow Myrtle (Agonis flexuosa)	Australian Native	19,19,24,17,20	7	9	Mature	Fair	Poor	Low		5.3	
82	Almond, Cherry, Peach, Plum (Prunus sp.)	Exotic Deciduous	19,25	6	8	Mature	Fair - Poor	Fair	Low		3.8	
83	Weeping Willow (Salix babylonica)	Exotic Deciduous	67	11	12	Mature	Fair	Poor	Low	Limb Decay.	8.0	

**Appendix 1: Tree Group details: 10 Alvina Street, Oakleigh South.**

Tree Group No.	Common Name (Botanical Name)	Average Height	Average DBH (cm)	Number of Stems	Life Stage	Overall Health	Overall Structure	Retention Value	Comments
1	Coast Wattle (Acacia longifolia var. sophorae)	5	20 @ 0.1m	6	Semi-mature	Fair	Fair - Poor	None	Self seeded
2	Narrow-leaved Black Peppermint (Eucalyptus nicholii)	16	40	5	Semi-mature	Fair	Fair - Poor	Low	



Sinclair St

Alvina St

Clayton West Primary School

Scotsburn Ave

Scotsburn Ave

Tree Group 1

Tree Group 2

Appendix 2: Tree numbers and Locations: 10 Alvina Street, Oakleigh South (Tree Logic, 2013)


### Appendix 3: Arboricultural Descriptors (October 2011)

#### Tree Condition

The assessment of tree condition evaluates factors of health and structure. The descriptors of health and structure attributed to a tree evaluate the individual specimen to what could be considered typical for that species growing in its location. For example, some species can display inherently poor branching architecture, such as multiple acute branch attachments with included bark.

Whilst these structural defects may technically be considered arboriculturally poor, they are typical for the species and may not constitute an increased risk of failure. These trees may be assigned a structural rating of fair-poor (rather than poor) at the discretion of the author.

Diagram 1, provides an indicative distribution curve for tree condition to illustrate that within a normal tree population the majority of specimens are centrally located within the condition range (normal distribution curve). Furthermore, that those individual trees with an assessed condition approaching the outer ends of the spectrum occur less often.

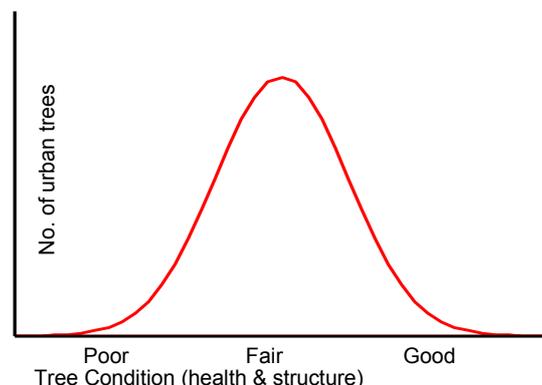

**Diagram 1:** Indicative normal distribution

#### Tree Name

Provides botanical name, (genus, species, variety and cultivar) according to accepted international code of taxonomic classification, and common name.

#### Tree Type

Describes the general geographic origin of the species and its type e.g. deciduous or evergreen.

Category	Description
Indigenous	Occurs naturally in the area or region of the subject site
Victorian native	Occurs naturally within some part of the State of Victoria (not exclusively) but is not indigenous
Australian native	Occurs naturally within Australia but is not a Victorian native or indigenous
Exotic deciduous	Occurs outside of Australia and typically sheds its leaves during winter
Exotic evergreen	Occurs outside of Australia and typically holds its leaves all year round
Exotic conifer	Occurs outside of Australia and is classified as a gymnosperm
Native conifer	Occurs naturally within Australia and is classified as a gymnosperm
Native Palm	Occurs naturally within Australia. Woody monocotyledon
Exotic Palm	Occurs outside of Australia. Woody monocotyledon

#### Height and Width

Indicates height and width of the individual tree; dimensions are expressed in metres. Crown heights are measured with a height meter where possible. Due to the topography of some sites and/or the density of vegetation it may not be possible to do this for every tree. Tree heights may be estimated in line with previous height meter readings in conjunction with author’s experience. Crown widths are generally paced (estimated) at the widest axis or can be measured on two axes and averaged. In some instances the crown width can be measured on the four cardinal direction points (North, South, East and West).

#### Diameter at Breast Height (DBH)

Indicates the trunk diameter (expressed in centimetres) of an individual tree measured at 1.4m above the existing ground level or where otherwise indicated, multiple leaders are measured individually. Plants with multiple leader habit may be measured at the base. The range of methods to suit particular trunk shapes, configurations and site conditions can be seen in Appendix A of Australian Standard AS 4970-2009 Protection of trees on development sites. Measurements undertaken with foresters’ tape or builders tape.

Health

Assesses various attributes to describe the overall health and vigour of the tree.

Category	Vigour/Extension growth	Decline symptoms/Deadwood	Foliage density, colour, size, intactness	Pests and or disease
Good	Above typical	None or minimal	Better than typical	None or minimal
Fair	Typical	Typical or expected	Typical	Typical, within damage thresholds
Fair to Poor	Below typical	More than typical	Exhibiting deficiencies	Exceeds damage thresholds
Poor	Minimal	Excessive and large amount/size	Exhibiting severe deficiencies	Extreme and contributing to decline
Dead	N/A	N/A	N/A	N/A


Structure

Assesses principal components of tree structure (Diagram 2).

Descriptor	Zone 1 - Root plate & lower stem	Zone 2 - Trunk	Zone 3 - Primary branch support	Zone 4 - Outer crown and roots
Good	No damage, disease or decay; obvious basal flare / stable in ground	No damage, disease or decay; well tapered	Well formed, attached, spaced and tapered	No damage, disease, decay or structural defect
Fair	Minor damage or decay. Basal flare present.	Minor damage or decay	Typically formed, attached, spaced and tapered	Minor damage, disease or decay; minor branch end-weight or over-extension
Fair to Poor	Moderate damage or decay; minimal basal flare	Moderate damage or decay; approaching recognised thresholds	Weak, decayed or with acute branch attachments; previous branch failure evidence	Moderate damage, disease or decay; moderate branch end-weight or over-extension
Poor	Major damage, disease or decay; fungal fruiting bodies present. Excessive lean placing pressure on root plate	Major damage, disease or decay; exceeds recognised thresholds; fungal fruiting bodies present. Acute lean. Stump resprout	Decayed, cavities or has acute branch attachments with included bark; excessive compression flaring; failure likely	Major damage, disease or decay; fungal fruiting bodies present; major branch end-weight or over-extension
Very Poor	Excessive damage, disease or decay; unstable / loose in ground; altered exposure; failure probable	Excessive damage, disease or decay; cavities. Excessive lean. Stump resprout	Decayed, cavities or branch attachments with active split; failure imminent	Excessive damage, disease or decay; excessive branch end-weight or over-extension

**Diagram 2:** Tree structure zones

1. Root plate & lower stem
2. Trunk
3. Primary branch support
4. Outer crown & roots

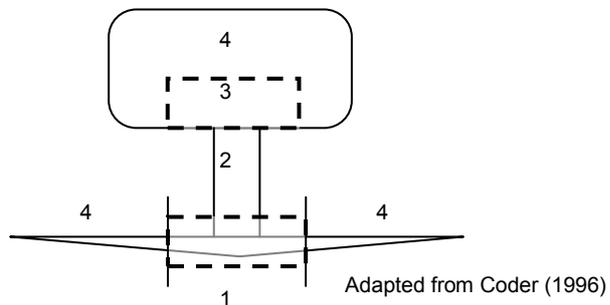

Trees are assessed and the given a rating for a point in time. Generally, trees with a poor or very poor structure are beyond the benefit of practical arboricultural treatments. The lowest or worst descriptor assigned to the tree in any column could generally be the overall rating assigned to the tree. The assessment for structure is limited to observations of external and above ground tree parts. It does not include any exploratory assessment of underground or internal tree parts unless this is requested as part of the investigation.

Appendix 3: Tree Logic Tree descriptors.

Structure ratings will also take into account general tree architecture which considers aspects of stem taper, live crown ratio, branch distribution or crown bias and position such as a tree being suppressed amongst more dominant trees.

The management of trees in the urban environment requires appropriate arboricultural input and consideration of risk. Risk potential will take into account the combination of likelihood of failure and impact, including the perceived importance of the target(s).

Life Stage

Relates to the physiological stage of the tree's life cycle.

Category	Description
Young	Sapling tree and/or recently planted
Semi-mature	Tree rapidly increasing in size and yet to achieve expected size in situation
Maturing	Specimen approaching expected size in situation, with reduced incremental growth
Over-mature	Tree is senescent and in decline

Arboricultural Rating

Relates to the combination of tree condition factors, including health and structure (arboricultural merit), and also conveys an amenity value. Amenity relates to the trees biological, functional and aesthetic characteristics (Hitchmough 1994) within an urban landscape context.

Category	Description
High	Tree of high quality in good to fair condition. Generally a prominent arboricultural feature. These trees have the potential to be a medium- to long-term component of the landscape if managed appropriately. Retention of these trees is highly desirable.
Moderate	Tree of moderate quality, in fair or better condition. Tree may have a condition, and or structural problem that will respond to arboricultural treatment. These trees have the potential to be a medium- to long-term component of the landscape if managed appropriately. Retention of these trees is generally desirable.
Low	Tree of low quality and/or little amenity value. Tree in poor health and/or with poor structure. Tree is not significant for its size and/or young. These trees are easily replaceable. Tree (species) is functionally inappropriate to specific location and would be expected to be problematic if retained. Retention of such trees may be considered if not requiring a disproportionate expenditure of resources for a tree in its condition and location.
None	Tree has a severe structural defect and/or health problem that cannot be sustained with practical arboricultural techniques and the loss of tree would be expected in the short term. Tree whose retention would not be viable after the removal of adjacent trees (includes trees that have developed in close spaced groups and would not be expected to acclimatise to severe alterations to surrounding environment – removal of adjacent shelter trees). Tree has a detrimental effect on the environment, for example, the tree is a woody weed with potential to spread into waterways or natural areas.

## Tree significance

Trees have many values, not all of which are considered when an arboricultural assessment is undertaken. However, individual trees or tree group features may be considered important community resources because of unique or noteworthy characteristics or values other than their age, dimensions, health or structural condition. Recognition of one or more of the following criterion is designed to highlight other considerations that may influence the future management of such trees.

Significance	Description
Horticultural Value/ Rarity	Outstanding horticultural or genetic value; could be an important source of propagating stock, including specimens that are particularly resistant to disease or exposure. Any tree of a species or variety that is rare.
Historic, Aboriginal Cultural or Heritage Value	Tree could have value as a remnant of a particular important historical period or a remnant of a site or activity no longer in action. Tree has a recognised association with historic aboriginal activities, including scar trees.  Tree commemorates a particular occasion, including plantings by notable people, or having associations with an important event in local history.
Ecological Value	Tree could have value as habitat for indigenous wildlife, including providing breeding, foraging or roosting habitat, or is a component of a wildlife reserve.  Remnant Indigenous vegetation that contribute to biological diversity

**Bibliography:**

Coder, K D. (1996) Construction damage assessments: trees and sites, University of Georgia, USA

Hitchmough, J.D. (1994) Urban landscape management, Inkata Press, Australia

Gooding, R.F., Ingram, J.B., Urban, J.R., Bloch, L.B., Steigerwaldt, W.M, Harris, R.W. and Allen, E.N. (2000) Guide for plant appraisal, 9th edition, International society of Arboriculture, USA

Pollard, A. H. (1974) Introductory statistics: a service course, Pergamon Press Australia, Australia.

Standards Australia (2009) Australian Standard AS 4970-2009 Protection of trees on development sites.

## **Appendix 4: Tree protection zones.** Tree Logic Pty. Ltd. © 2005

### **1.0 Introduction**

In order to sustain trees on a development site consideration must be given to the establishment of tree protection zones.

The physical dimensions of tree protection zones can sometimes be difficult to define. The projection of a tree's crown can provide a guide but is by no means the definitive measure. The unpredictable nature of roots and their growth, differences between species and their tolerances, and observable and hidden changes to the trees growing environment, as a result of development, are variables that must be considered.

Most vigorous, broad canopied trees survive well if the area within the drip-line of the canopy is protected. Fine root density is usually greater beneath the canopy than beyond (Gilman, 1997). If few to no roots over 3cm in diameter are encountered and severed during excavation the tree will probably tolerate the impact and root loss. A healthy tree can sustain a loss of between 30% and 50% of absorbing roots (Harris, Clark, Matheny, 1999), however encroachment into the structural root system of a tree may be problematic.

The structural root system of a tree is responsible for ensuring the stability of the entire tree structure in the ground. A tree could not sustain loss of structural root system and be expected to survive let alone stand up to average annual wind loads upon the crown.

### **2.0 Allocation of tree protection zone (TPZ)**

The method of allocating a TPZ to a particular tree will be influenced by site factors, the tree species, its age and developed form.

Once it has been established, through an arboricultural assessment, which trees and tree groups are to be retained, the next step will require careful management through the development process to minimise any impacts on the designated trees. The successful retention of trees on any particular site will require the commitment and understanding of all parties involved in the development process. The most important activity, after determining the trees that will be retained is the implementation of a TPZ.

The intention of tree protection zones is to:

- mitigate tree hazards;
- provide adequate root space to sustain the health and aesthetics of the tree into the future;
- minimise changes to the trees growing environment, which is particularly important for mature specimens;
- minimise physical damage to the root system, canopy and trunk; and
- define the physical alignment of the tree protection fencing

### **Tree protection**

The most important consideration for the successful retention of trees is to allow appropriate above and below ground space for the trees to continue to grow. This requires the allocation of tree protection zones for retained trees.

The Australian Standard AS 4970-2009 Protection of trees on development sites has been used as a guide in the allocation of TPZs for the assessed trees. The TPZ for individual trees is calculated based on trunk (stem) diameter (DBH), measured at 1.4 metres up from ground level. The radius of the TPZ is calculated by multiplying the trees DBH by 12. The method provides a TPZ that addresses both the stability and growing requirements of a tree. TPZ distances are measured as a radius from the centre of the trunk at (or near) ground level. The minimum TPZ should be no less than 2m and the maximum no more than 15m radius. The TPZ of palms should be not less than 1.0m outside the crown projection.

Encroachment into the TPZ is permissible under certain circumstances though is dependent on both site conditions and tree characteristics. Minor encroachment, up to 10% of the TPZ, is generally permissible provided encroachment is compensated for by recruitment of an equal area contiguous with the TPZ. Examples are provided in Diagram 1. Encroachment greater than 10% is considered major encroachment under AS4970-2009 and is only permissible if it can be demonstrated that after such encroachment the tree would remain viable.

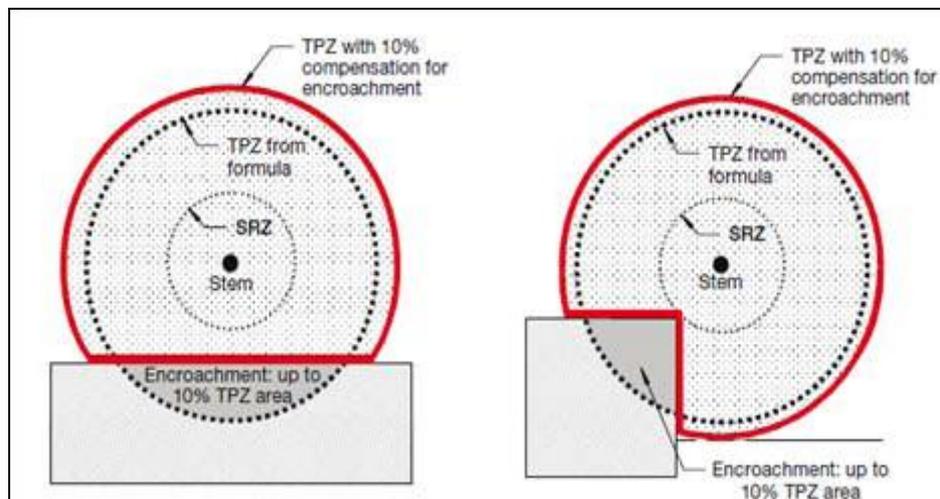


Diagram 1: Examples of minor encroachment into a TPZ. Extract from: AS4970-2009, Appendix D, p30 of 32

The 10% encroachment on one side equates to approximately  $\frac{1}{3}$  radial distance. Tree root growth is opportunistic and occurs where the essentials to life (primarily air and water) are present. Heterogeneous soil conditions, existing barriers, hard surfaces and buildings may have inhibited the development of a symmetrically radiating root system.

Existing infrastructure around some trees may be within the TPZ or root plate radius. The roots of some trees may have grown in response to the site conditions and therefore if existing hard surfaces and building alignments are utilised in new designs the impacts on the trees should be minimal. The most reliable way to estimate root disturbance is to find out where the roots are in relation to the demolition, excavation or construction works that will take place (Matheny & Clark, 1998). Exploratory excavation prior to commencement of construction can help establish the extent of the root system and where it may be appropriate to excavate or build.

The TPZ should also give consideration to the canopy and overall form of the tree. If the canopy requires severe pruning in order to accommodate a building and in the process the form of the tree is diminished it may be worthwhile considering altering the design or removing the tree.

### **General tree protection guidelines**

The most important factors are:

- Prior to construction works the trees nominated for tree works should be pruned to remove larger dead wood. Pruning works may also identify other tree hazards that require remedial works.
- Installation of tree protection fencing. Once the tree protection zones have been determined the next step is to mulch the zone with woodchip and erect tree protection fencing. This must be completed prior to any materials being brought on-site, erection of temporary site facilities or demolition/earth works. The protection fencing must be sturdy and withstand winds and construction impacts. The protection fence should only be moved with approval of the site supervisor. Other root zone protection methods can be incorporated if the TPZ area needs to be traversed.
- Appropriate signage is to be fixed to the fencing to alert people as to importance of the tree protection zone.
- The importance of tree preservation must be communicated to all relevant parties involved with the site.
- Inspection of trees during excavation works.

### **Exploratory excavation**

The most reliable way to estimate root disturbance is to find out where the roots are in relation to the demolition, excavation or construction works that will take place (Matheny & Clark, 1998).

Exploratory excavation prior to commencement of construction can help establish the extent of the root system and where it may be appropriate to excavate or build. This also allows management decisions to be made and allows time for redesign works if required.

Any exploratory excavation within the allocated TPZ is to be undertaken with due care of the roots. Minor exploration is possible with hand tools. More extensive exploration may require the use of high pressure water or air excavation techniques. Either hydraulic or pneumatic excavation techniques will safely expose tree roots; both have specific benefits dependent on the situation and soil type. An arborist is to be consulted on which system is best suited for the site conditions.

Substantial roots are to be exposed and left intact.

Once roots are exposed decisions can be made regarding the management of the tree. Decisions will be dependent on the tree species, its condition, its age, its relative tolerance to root loss, and the amount of root system exposed and requiring pruning.

Other alternative measures to encroaching the TPZ may include boring or tunnelling.

### **Construction Guidelines**

The following are guidelines that must be implemented to minimise the impact of the proposed construction works on the retained trees.

- The Tree Protection Zone (TPZ) is fenced and clearly marked at all times. The actual fence specifications should be a minimum of 1.2 - 1.5 metres of chain mesh or like fence with 1.8 meter posts (e.g. treated pine or star pickets) or like support every 3-4 metres and a top line of high visibility plastic hazard tape. The posts should be strong enough to sustain knocks from on site excavation equipment. This fence will deter the placement of building materials, entry of heavy equipment and vehicles and also the entry of workers and/or the public into the TPZ. Note: There are many different variations on the construction type and material used for TPZ fences, suffice to say that the fence should satisfy the responsible authority.
- Contractors and site workers should receive written and verbal instruction as to the importance of tree protection and preservation within the site. Successful tree preservation occurs when there is a commitment from all relevant parties involved in designing, constructing and managing a development project. Members of the project team need to interact with each other to minimise the impacts to the trees, either through design decisions or construction practices. The importance of tree preservation must be communicated to all relevant parties involved with the site.
- The consultant arborist is on-site to supervise excavation works around the existing trees where the TPZ will be encroached.
- A layer of organic mulch (woodchips) to a depth of no more than 100mm should be placed over the root systems within the TPZ of trees, which are to be retained so as to assist with moisture retention and to reduce the impact of compaction.
- No persons, vehicles or machinery to enter the TPZ without the consent of the consulting arborist or site manager.
- Where machinery is required to operate inside the TPZ it must be a small skid drive machine (i.e Dingo or similar) operating only forwards and backwards in a radial direction facing the tree trunk and not altering direction whilst inside the TPZ to avoid damaging, compacting or scuffing the roots.
- Any underground service installations within the allocated TPZ should be bored and utility authorities should common trench where possible.
- No fuel, oil dumps or chemicals shall be allowed in or stored on the TPZ and the servicing and re-fuelling of equipment and vehicles should be carried out away from the root zones.
- No storage of material, equipment or temporary building should take place over the root zone of any tree.
- Nothing whatsoever should be attached to any tree including temporary services wires, nails, screws or any other fixing device.
- Supplementary watering should be provided to all trees through any dry periods during and after the construction process. Proper watering is the most important maintenance task in terms of successfully retaining the designated trees. The areas under the canopy drip lines should be mulched with woodchip to a depth of no more than 100mm. The mulch will help maintain soil moisture levels. Testing with a soil probe in a number of locations around the tree will help ascertain soil moisture levels and requirements to irrigate. Water needs to be applied slowly to avoid runoff. A daily

watering with 5 litres of water for every 30 mm of trunk calliper may provide the most even soil moisture level for roots (Watson & Himelick, 1997), however light frequent irrigations should be avoided. Irrigation should wet the entire root zone and be allowed to dry out prior to another application. Watering should continue from October until April.

### References

- Bernatzky, A. 1978. *Tree Ecology and Preservation*. New York: Elsevier Publishing.
- British Standard 5837. 1991. *Guide for Trees in relation to construction*. British Standards Institute.
- Gilman, E. F. 1997. *Trees for Urban and Suburban Landscapes*. Delmar.
- Harris, R. W, Clark J.R. & Matheny N.P. 1999. *Arboriculture: Integrated Management of Landscape Trees, Shrubs and Vines, Third Edition*. Prentice - Hall, New Jersey.
- Helliwell, D. R. 1985. *Trees on Development Sites*. Arboricultural Association UK.
- Matheny, N. & Clark, J. R. 1998. *Trees and development – A technical guide to preservation of trees during land development*. International Society of Arboriculture, Publishers.
- Mattheck, C. & Breloer, H. 1994. *The Body Language of Trees* HMSO
- Mattheck C. 2002. *Tree Mechanics*, Forschungszentrum Karlsruhe GMBH
- Tattar, T. A. 1989. *Diseases of Shade Trees*, 2<sup>nd</sup> ed. San Diego: Academic Press.
- Watson, G. W. & Himelick, E. B. 1997. *Principals and Practices of Planting Trees and Shrubs*. International Society of Arboriculture.

Tree Logic Pty. Ltd.  
Unit 4, 21 Eugene Terrace  
Ringwood Vic 3134

Arboricultural Consultancy:  
Precedent disclaimer and copyright

Copyright notice: ©Tree Logic 2013. All rights reserved, except as expressly provided otherwise in this publication.

Disclaimer: Although Tree Logic uses all due care and skill in providing you the information made available in this report, to the extent permitted by law Tree Logic otherwise excludes all warranties of any kind, either expressed or implied.

To the extent permitted by law, you agree the Tree Logic is not liable to you or any other person or entity for any loss or damage caused or alleged to have been caused (including loss or damage resulting from negligence), either directly or indirectly, by your use of the information (including by way of example, arboricultural advice) made available to you in this report. Without limiting this disclaimer, in no event will Tree Logic be liable to you for any lost revenue or profits, or for special, indirect, consequential or incidental damage (however caused and regardless of the theory of liability) arising out of or related to your use of that information, even if Tree Logic has been advised of the possibility of such loss or damage.

This disclaimer is governed by the law in force in the State of Victoria, Australia.

Report Assumptions:

- Any legal description provided to Tree Logic Pty. Ltd. is assumed to be correct. Any titles and ownerships to any property are assumed to be correct. No responsibility is assumed for matters outside the consultant's control.
- Tree Logic Pty. Ltd. assumes that any property or project is not in violation of any applicable codes, ordinances, statutes or other local, state or federal government regulations.
- Tree Logic Pty. Ltd. shall take care to obtain all information from reliable sources. All data shall be verified insofar as possible; however Tree Logic can neither guarantee nor be responsible for the accuracy of the information provided by others not directly under Tree Logic's control.
- No Tree Logic employee shall be required to give testimony or to attend court by reason of the report unless subsequent contractual arrangements are made, including payment of an additional fee for such services.
- Loss of the report or alteration of any part of the report not undertaken by Tree Logic Pty. Ltd. invalidates the entire report.
- Possession of the report or a copy thereof does not imply right of publication or use for any purpose by anyone but the client or their directed representatives, without the prior consent of the Tree Logic Pty. Ltd.

- The report and any values expressed therein represent the opinion of Tree Logic's consultant and Tree Logic's fee is in no way conditional upon the reporting of a specified value, a stipulated result, the occurrence of a subsequent event, nor upon any finding to be reported.
- Sketches, diagrams, graphs and photographs used in the report, being intended as visual aids, are not necessarily to scale and should not be construed as engineering or architectural drawings, reports or surveys.
- Unless expressed otherwise: i) Information contained in the report will cover those items that were outlined in the project brief or that were examined during the assessment and reflect the condition of those items at the time of inspection; and ii) The inspection is limited to visual examination of accessible components without dissection, excavation or probing unless otherwise stipulated.
- There is no warranty or guarantee, expressed or implied by Tree Logic Pty. Ltd., that the problems or deficiencies of the plants or site in question may not arise in the future.
- All instructions (verbal or written) that define the scope of the report have been included in the report and all documents and other materials that the Tree Logic consultant has been instructed to consider or to take into account in preparing the report have been included or listed within the report.

To the writer's knowledge all facts, matter and all assumptions upon which the report proceeds have been stated within the body of the report and all opinion contained within the report will be fully researched and referenced and any such opinion not duly researched is based upon the writers experience and observations.